
LIQUI MOLY

ALL ABOUT GARDEN EQUIPMENT

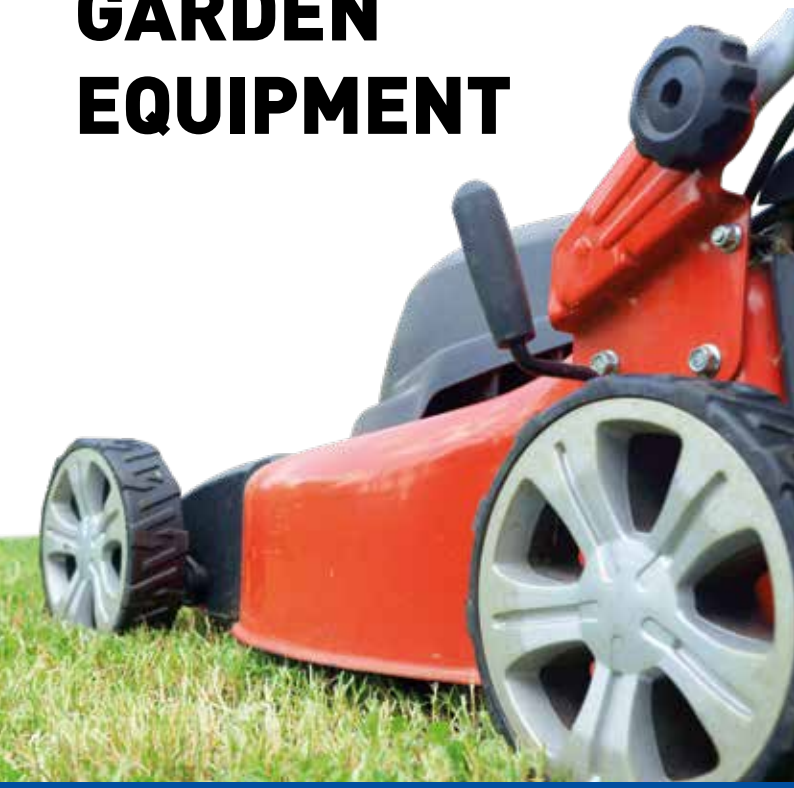

PRODUCTS FOR GARDEN EQUIPMENT FROM LIQUI MOLY:

DISCOVER ONLINE OUR COMPLETE GARDEN ASSORTMENT

Whether as a preventive measure or for problem-related application: our range of additives and oils offers the right solution for every requirement.

Online you will quickly find the right product for your purpose - simply scan the QR code:



ADDITIVES



Petrol Stabilizer

Preserves and protects fuel against aging and oxidation. Prevents corrosion throughout the entire fuel system. Prevents problems from occurring when classic cars, convertibles, motorcycles, motor scooters, ATVs, lawnmowers, chainsaws and other gasoline-driven 2-stroke and 4-stroke engines are decommissioned. Increases operational reliability. The product has a long-term effect.

Suitable for all gasoline engines, particularly for preventive use. Tested for turbochargers and catalytic converters. Add to the fuel and repeat dosage after refueling. Filling the dosage chamber (25 ml) once is sufficient for 5 l of fuel. Also suitable for long-term use in seldom used engines.

250 ml, Part no. 5107 D-F-NL
250 ml, Part no. 21646 D-E-P

LUBRICANTS



2-Cycle Power Saw Oil

High-quality and high-performance motor oil that was specially developed for the lubrication of air-cooled 2-stroke engines. Exceeds the strict requirements of the leading chainsaw manufacturers. With API-TC. For optimum lubrication and wear protection even under extreme conditions. With effective corrosion protection. Ensures a clean engine. Tested on engines with catalytic converters.

For high-performance chainsaws with or without a catalytic converter. Mixes very well with fuels. Please note that the mixture ratio specified by the manufacturer must be observed.

Specifications and approvals:
API TC

1 l, Part no. 1282 D

LUBRICANTS



2-Stroke Motor Oil

High-grade, semi-synthetic 2-stroke motor oil for use in all 2-stroke engines. Assures reliable operation of the engine and maximizes the operating life. Self-mixing. Selected mineral and synthetic base oils in combination with state-of-the-art additive technology permit residue-free combustion to keep the engine clean. The engine is optimally protected against wear.

For separate and mixture lubrication in motorcycles, mopeds, lawnmowers, chainsaws and emergency power units. Mixing ratio up to 1:50.

Specifications and approvals:
API TC, ISO L-EGC, JASO FC, TISI (Thailand International Standards Institute)

100 ml, Part no. 1029 [D]
250 ml, Part no. 1051 [D]
1 l, Part no. 1052 [D]
1 l, Part no. 20459 [D-PL-H-RO-TR]
5 l, Part no. 1189 [D]
60 l, Part no. 4700 [D-GB]



Lawnmower Oil SAE 30

Single-grade motor oil with high-quality base oils and high additive content. Ensures first-class lubrication, maximum engine cleanliness, outstanding wear protection and a long service life of the lawnmower engine. Also provides reliable protection against corrosion under adverse conditions and when overwintering. Tested on engines with catalytic converters.

For 4-stroke lawnmower engines, emergency power units and other engines that require a single-grade motor oil with viscosity class SAE 30 and the existing specifications.

Specifications and approvals:
API SJ

1 l, Part no. 1264 [D-BOOKLET]
5 l, Part no. 1266 [D-BOOKLET]



Garden Winter Equipment Oil 5W-30

Multigrade motor oil with high-quality base oils based on synthetic technology and a high additive content. Ensures optimum lubrication and outstanding engine cleanliness year-round, even under the most demanding conditions.

For 4-stroke gasoline and diesel engines in snow blowers, lawnmowers, emergency power units, riding mowers, chippers, rotary tillers, scarifiers, string trimmers, high-pressure cleaners, etc.

Specifications and approvals:
ACEA C3, API SN

1 l, Part no. 1279 D-BOOKLET



Universal Oil for Garden Equipment 10W-30

Multigrade motor oil with high-quality base oils and high additive content. Ensures optimum lubrication and outstanding engine cleanliness year-round, even under the most demanding conditions.

For 4-stroke gasoline and diesel engines in lawnmowers, emergency power units, riding mowers, chippers, rotary tillers, scarifiers, string trimmers, high-pressure cleaners, snow blowers, etc.

Specifications and approvals:
ACEA A3, ACEA B3, API CF, API SG, API SH, API SJ

1 l, Part no. 1273 D-BOOKLET

LUBRICANTS



Bio Saw Chain Oil

Environmentally friendly, biodegradable chain oil (test OECD 301 B), plant based. Thanks to the outstanding adhesion properties and first-class lubricating effect, provides optimum protection of moving parts such as chain links and joints against wear and corrosion. Ensures year-round use at all outside temperatures based on its favorable viscosity characteristics. Tested by the KWF (Committee for Forests and Forestry [Germany]).

For lubricating chains on chainsaws. Also suitable for extreme applications such as sawing hardwoods.

BLUE ANGEL
THE GERMAN ECOLABEL

www.blauer-engel.de/uz178

1 l, Part no. 1280 D-BOOKLET
5 l, Part no. 1281 D-BOOKLET



Saw Chain Oil 100

Mineral-based high-performance oil for once-through loss lubrication. Thanks to the outstanding adhesion properties and first-class lubricating effect, provides optimum protection of moving parts such as chain links and joints against wear and corrosion. Ensures year-round use at all outside temperatures based on its favorable viscosity characteristics.

For lubricating chains on chainsaws, reciprocating saws, etc. Also suitable for extreme applications such as sawing hardwoods.

1 l, Part no. 1277 D-BOOKLET
5 l, Part no. 1278 D-BOOKLET
60 l, Part no. 1191 D-GB



Hydraulic Oil HLP 22

Mineral-based hydraulic oil of the HLP type classification as per DIN 51524 Part 2. Contains selected agents for improving resistance to aging, wear and corrosion protection and the EP properties. Ideally suited for systems in which high thermal loads may occur.

For machinery, pumps and systems. The operating instructions of the machine and plant manufacturers must be observed.

Viscosity ISO VG 22

Specifications and approvals:
Hydrauliköl DIN 51524 Part 2 HLP 22

1 l, Part no. 6954 [D]
20 l, Part no. 4719 [D-GB]
205 l, Part no. 4131 [D-GB]



Hydraulic Oil HLP 32

Mineral-based hydraulic oil of the HLP type classification as per DIN 51524 Part 2. Contains selected agents for improving resistance to aging, wear and corrosion protection and the EP properties. Ideally suited for systems in which high thermal loads may occur.

For machinery, pumps and systems. The operating instructions of the machine and plant manufacturers must be observed. Viscosity ISO VG 32.

Viscosity ISO VG 32

Specifications and approvals:
Hydrauliköl DIN 51524 Part 2 HLP 22

1 l, Part no. 23191 [D]
20 l, Part no. 1107 [D-GB-I-E-P]
60 l, Part no. 1108 [D-GB]
205 l, Part no. 1109 [D-GB]

LUBRICANTS



Hydraulic Oil HLP 46

Mineral-based hydraulic oil of the HLP type classification as per DIN 51524 Part 2. Contains selected agents for improving resistance to aging, wear and corrosion protection and the EP properties. Ideally suited for systems in which high thermal loads may occur.

For machinery, pumps and systems. The operating instructions of the machine and plant manufacturers must be observed.

Viscosity ISO VG 46

Specifications and approvals: Hydrauliköl DIN 51524 Part 2 Part 46

1 l, Part no. 1117 [D]
20 l, Part no. 1110 [D-GB]
60 l, Part no. 1111 [D-GB]
205 l, Part no. 1112 [D-GB]



Compressor Oil

Modern low-friction oil that was developed specifically for all-season use in air compressors. The combination of unconventional base oils with a selected additive technology guarantees a compressor oil that supplies the compressor with oil perfectly, has outstanding high-pressure and wear protection properties and ensures a long compressor service life thanks to the excellent corrosion protection.

For compressed air compressors that require a lubricant with this specification.

LIQUI MOLY recommends this product for vehicles or assemblies for which the following specifications or original spare part numbers are required: SAE 5W-40, VDL 100

1 l, Part no. 1187 [D-GB]

MAINTENANCE PRODUCTS



Robotic lawnmower cleaning and care spray

For cleaning robotic lawnmowers without scratching or leaving streaks. Maintains and protects plastics against UV radiation when used regularly. Prevents embrittlement and bleaching out of the material.

Suitable for all robotic lawnmowers. Can also be used for robotic vacuum cleaners. Do not use on hot surfaces or in direct sunlight. Store free of frost.

300 ml, Part no. 21343 D



Treatment Spray for Garden Equipment

Keeps moving parts moving. Prevents squealing noise. Protects all metal parts against corrosion during overwintering. Neutral acting on plastics, paints, metals and wood. For smoother running of lawn edge cutters and hedge cutters, etc. Plant based, therefore environmentally friendly.

Lubricates, protects and maintains garden equipment such as lawn edge cutters and hedge cutters, etc.

300 ml, Part no. 1615 [D-GB-I-E-P]

MAINTENANCE PRODUCTS



LM 40 Multi-Purpose Spray

Lubricates, cleans, loosens, protects and preserves. Keeps moving parts moving. Loosens stubbornly rusted and burnt-on screws quickly. Infiltrates and removes dirt and stubborn oil and grease residues. Provides protection against rust and corrosion and protects chrome parts. Reaches even the most hidden lubrication points thanks to its excellent penetration properties.

The multipurpose product for house, hobby, workshop, vehicle and industry. For hinges, rollers, locks, bolts, switches, handles, Bowden cables, vehicle antennas and much more.

50 ml, Part no. 3394 [D]
200 ml, Part no. 2815 [DK/N-S-FIN]
200 ml, Part no. 3390 [D-GB-I]
200 ml, Part no. 8946 [D-NL-F-GR-ARAB]
400 ml, Part no. 2816 [GB-DK-FIN-N-S]
400 ml, Part no. 3391 [D-GB-I-E-P]
5 l, Part no. 3395 [D]



Rapid Cleaner

Makes assembly work easier, cleaner and safer. Removes oil, grease and dirt quickly and completely. Parts treated will be completely free of residues and fully degreased afterwards. Saves time and money and guarantees trouble-free repair work. Removes resin, oil and grease residues. Has excellent penetration properties as well as controlled evaporation, free of residues.

Universal cleaner for rapid cleansing and degreasing of small components in vehicle and industrial engineering. For brakes, clutches, transmissions, and for fitting and repair work. Removes oil and grease spots from floor coverings, materials and linings.

500 ml, Part no. 3318 [D-GB-I-E-P]
500 ml, Part no. 2868 [GB-DK-FIN-N-S]
500 ml, Part no. 1816 [D-NL-F-GR-ARAB]
500 ml, Part no. 2395 [D-F-I]
500 ml, Part no. 9525 [D-GB-F-ARAB]
500 ml, Part no. 2695 [PL-H-RO-TR]
5 l, Part no. 3319 [D-GB-I]
5 l, Part no. 1840 [D-NL-F-GR-ARAB]
5 l, Part no. 2824 [GB-DK-FIN-N-S]
60 l, Part no. 3333 [D-GB]



Start Fix

The reliable starting aid in cold or damp conditions, when the spark plugs are wet and battery charge is low. Consists of a combination of particularly highly flammable substances and is ideal for all gasoline and diesel engines. Helps combustion engines to start and is effective even at very low temperatures. Preserves the battery and is economic to use.

For all 2-stroke and 4-stroke gasoline and diesel engines in cars, trucks, buses, motorcycles, boats, construction machinery, tractors, lawnmowers, motor saws, etc.

200 ml, Part no. 1085 D-F-I
200 ml, Part no. 20768 D-GB-E-P
200 ml, Part no. 2991 DK-FIN-N-S







LIQUI MOLY GmbH
Jerg-Wieland-Straße 4
89081 Ulm
GERMANY

Phone: +49 731 1420-0
Fax: +49 731 1420-75
E-Mail: info@liqui-moly.com
www.liqui-moly.com

Technical Support:
Phone: +49 731 1420-871
E-Mail: support@liqui-moly.com

No liability for misprints.
Subject to technical modifications.



LIQUI MOLY-App
liqui-moly.to/AppStore
liqui-moly.to/PlayStore

Additional information and the right operating fluids for your vehicle can be found here.

With best compliments:

4 100420 527326